



PRODUCT FEATURES

- Perfectly designed as replacement for incandescent lamps which deliver a warm and cosy atmosphere by clear filament lamps
- Offers perfect linear dimming which is compatible with most popular EU dimmers
- 360° light illumination with uniform light distribution and high quality lighting performance
- Ideal for decorative fixtures with filament design
- High efficacy of up to 137 lm/W
- Up to 92% instant energy savings compared to traditional light bulbs

APPLICATIONS

- Decorative Installations
- Domestic Applications
- Hotels
- Restaurants
- Shops



GENERAL INFORMATION

Model Number	LC208053/dm/R9-CSv00
Product Code	LC208053/dm/R9-CSv00+E14+927+V0240
Cap Base	E14
Dimmable	100-10%
Warm Up Time 60% of Full Light	Instant
Starting Time	< 0.5 s
Working Temperature	-30°C to +45°C
Cover Design	Clear
Flammability of Plastic Component	≥ V2
Series	Candle (Filament Lamps)

LIFE PERFORMANCE

Lifetime (L70 B50)	15000
Number of Switching Cycles	>1000000

ELECTRICAL DATA

Input Voltage	220-240 VAC
Frequency	50 Hz
Power Factor	> 0.8
Equivalent Wattage	40 W
Power	5.3 W
Input Current	31 mA


PHOTOMETRICAL INFORMATION

Luminous Flux	470 lm
Luminous Efficacy	89 lm/W
Colour Temperature	Warmwhite (2700K)
CRI	≥ Ra90
Chromaticity Coordinates (x and y)	PHOTOMETRICAL_INFORMATION.chromaticity_coordinates_xy

CERTIFICATES & STANDARDS

Weighted Energy Consumption	6
Energy Class	A+
Photobiological Safety Group	RG1
Lamp Cap Twist Safe	1.15
Approvals	CE, RoHS
Standards Compliance	IEC/EN 62560, IEC/EN 62493, IEC/EN 62471, ERP 244, IEC 62612, IEC CISPR15, EN 55015, IEC/EN 61547, IEC/EN 61000-3-2, IEC/EN 61000-3-3

DIMENSIONS & WEIGHT

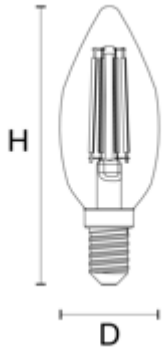

Height (H)	97 mm
Diameter (D)	35 mm
Weight	15 g

LOGISTIC INFORMATION

MM Code	Packaging Unit	Outer Box Dimensions			Gross Weight per Outer Box
		L mm	W mm	H mm	
146226/ MM09901	pcs/unit				kg
	1	40	40	110	0.0301
	60	275	226	257	2.2